




KITCHEN EXHAUST GREASE DUCT ACCESS DOOR

Model KEDU

KEES kitchen grease exhaust duct access doors provide efficient access to the interior of welded grease ducts to facilitate inspection and cleaning and help prevent dangerous grease buildup. A ceramic fiber gasket maintains a greaseproof, fire-tight seal and allows use with temperatures up to 2300°F. Bolted to the side or top of ducts, these UL-listed doors meet NFPA-96 requirements and provide quick, easy installation with no welding required.

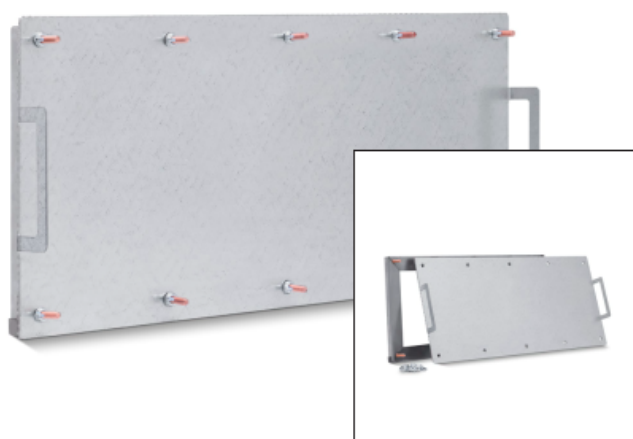

STANDARD MODEL KEDU GREASE DUCT DOOR



STANDARD SIZES (RECTANGULAR DUCT)

WIDTH X HEIGHT
5.5 X 8.5
5.5 X 13.5
5.5 X 21.5
6 X 6
7 X 7
7 X 12
7 X 20
12 X 12
12 X 20
16 X 20
20 X 20



UL LISTED GREASE DUCT ACCESS DOOR

Model KEDU For Rectangular Duct

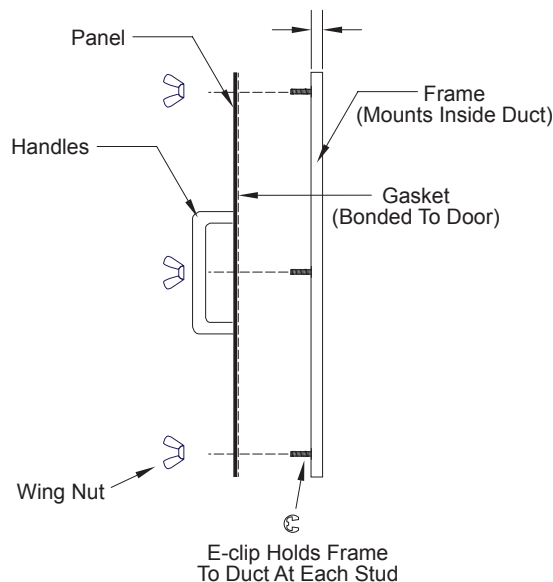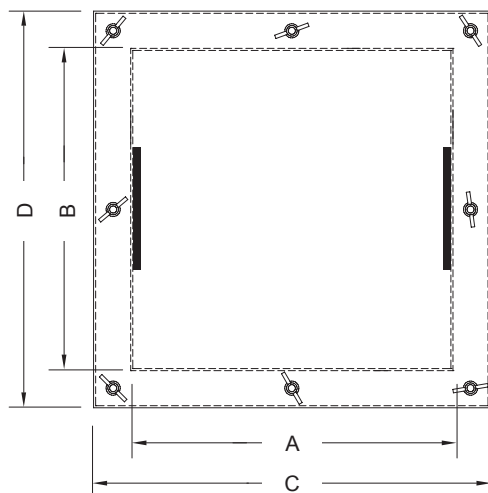

QTY	SIZE A X B*	FLANGE SIZE C X D
	5.5 X 8.5	7 X 10
	5.5 X 13.5	7 X 15
	5.5 X 21.5	7 X 23
	6 X 6	8 X 8
	7 X 7	10 X 10
	7 X 12	10 X 15
	7 X 20	10 X 23
	12 X 12	15 X 15
	12 X 20	15 X 23
	16 X 20	19 X 23
	20 X 20	23 X 23

*A X B dimension is also the duct opening size

SPECIFICATIONS

16-gauge door frame
16-gauge door panel
Ceramic fiber gasket (2300° F)
1/4" weld studs with wing nuts
Mill finish



OPTIONS

MATERIAL

- ☐ Galvanized Steel (Std.)
☐ 304 SS

STUDS

- ☐ 1" Long (Std.)
☐ 4" Long (accommodates zero clearance duct wrap)

To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	